

VORTAX


THE BEST USE FOR YOUR RECLAIM WATER

The Best Way to Prepare the Vehicle for a More Thorough Wash.

- *Make Better Use of your Reclaim Water for a More Efficient System*
- *Spinners Splash the Vehicle from Almost Every Direction*
- *Easy to Operate and a Breeze to Maintain make it a No Brainer to Install!*

www.nswash.com
800.782.1582

NS CORPORATION

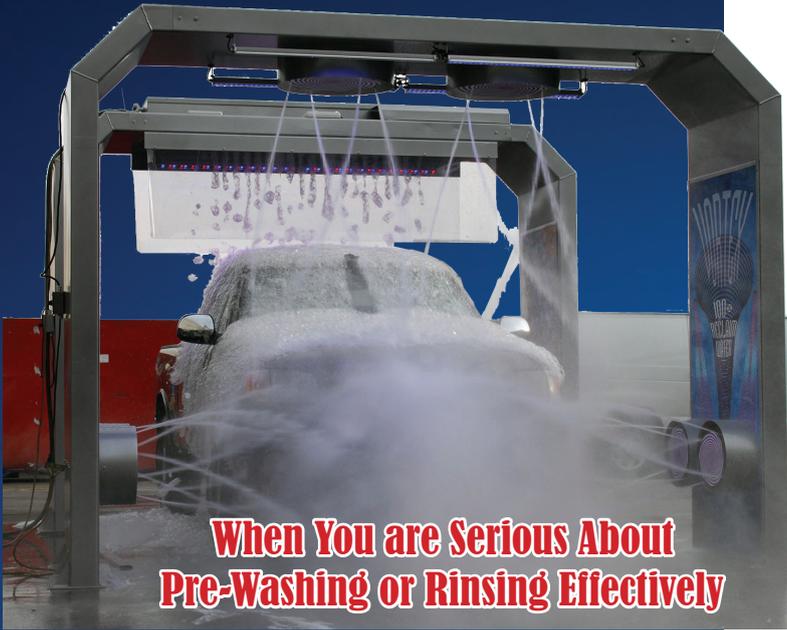

**When You are Serious About
Pre-Washing or Rinsing Effectively**

Minimum Bay:

Height = 10' (3.04 m)
Width = 18' (5.49 m)


Power Requirements:

208, 230 or 460 VAC
110 VAC 10 amp for lighting.

Pumping System:


3" supply line from reclaim pit
or above ground tank
2.00" water line from pump
to Vortex

Vortex Arch Pump Selection

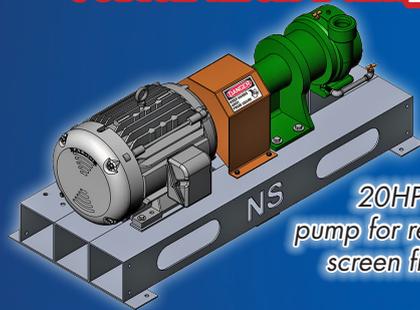

**Installation with
Above Ground Tank**

Model: PMP-020CP
20HP free standing centrifugal
pump for reclaim water. Includes SS
screen filter. 145 GPM @132 PSI.

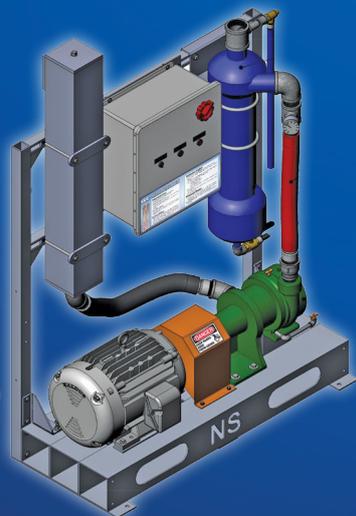

**Installation w/Below
Ground Reclaim Pit**

Model: RC-2000
20HP free standing
centrifugal pump for reclaim
water. Includes PAC II
particle accelerator, prime
tank, 3" foot valve, barrel
screen & pressure relief
valve. 145 GPM @132 PSI.

*Six water driven Vortex spinners w/
manifold stainless steel construction.*


*Standard 4 Multicolor LED light bars
rated IP66 with wireless remote control.*

Powder coated aluminium construction

All stainless steel hardware.

Internal galvanized plumbing.

*Everything to ensure years of reliable
operation.*

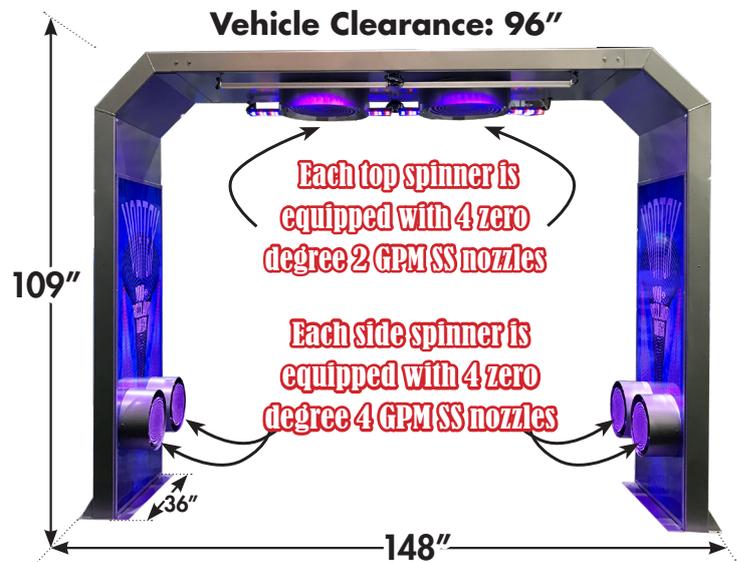

LED Lights

Making a Bright Impression

www.nswash.com
800.782.1582